

NOTES:


IT IS PERMISSABLE TO MANUALLY REALIGN THE JAWS IF THEY ARE OUT OF TOLERANCE

COMPONENT IS ROHS COMPLIANT

MALE STRIKE PROFILE DIMENSION REQUIREMENTS

HOLE SIZE	PANEL RANGE		HEAD HEIGHT	LENGTH
	MIN	MAX		
8.0 x 7.0	2	2.2	7.8	20.2

ISSUE	DATE	SIG	REMARKS
1	24/02/12	MIC	FIRST ISSUE

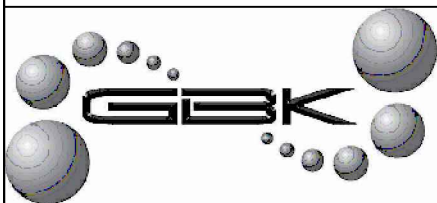

email: info@gbk-uk.com
web: www.gbk-uk.com

TOLERANCES

X 0.50
X.X 0.25
X.XX 0.10
ANGLES 0.25°
UNLESS OTHERWISE STATED

ALL DIMENSIONS IN mm

THIRD ANGLE PROJECTION



DO NOT SCALE FROM DRAWING,
IF IN DOUBT PLEASE ASK!

MATERIAL PA66 / PC-ABS / SUS

COLOUR BLACK

SCALE 3:1 @ A4

DRAWN MIC

DATE 24/02/12

SHEET 1 OF 1

© GBK UK Limited

THESE DRAWINGS AND THE SPECIFICATIONS, AND THE DATA CONTAINED THEREIN ARE THE PROPERTY OF GBK UK LIMITED, ISSUED IN STRICT CONFIDENCE AND SHALL NOT WITHOUT PRIOR WRITTEN PERMISSION OF GBK UK LIMITED BE PRODUCED, COPIED OR USED FOR ANY PURPOSE WHATSOEVER, EXCEPT THE MANUFACTURE OR ARTICLES FOR GBK UK LIMITED.

DESCRIPTION

PUSH LATCH
EXTENDED

DRAWING No.

41026