

#### NOTES:


COMPONENT IS ROHS COMPLIANT

PIN IS PRE-ASSEMBLED INTO BODY.

PUSH TO SET, UNSCREW TO REMOVE.

HOLE SIZE	PANEL RANGE		BODY HEAD	BODY HEAD HEIGHT	BODY/PIN HEAD HEIGHT	INTRUSION LENGTH
	MIN	MAX				
10Ø	6	14	18Ø	2.2	4.2	19

1	22/12/11	MIC	FIRST ISSUE
ISSUE	DATE	SIG	REMARKS

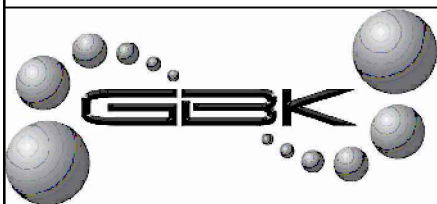

email: info@gbk-uk.com  
web: www.gbk-uk.com

#### TOLERANCES

X 0.50  
X.X 0.25  
X.XX 0.10  
ANGLES 0.25°  
UNLESS OTHERWISE STATED

ALL DIMENSIONS IN mm

THIRD ANGLE PROJECTION



DO NOT SCALE FROM DRAWING,  
IF IN DOUBT PLEASE ASK!

<b>MATERIAL</b>	PA66
<b>COLOUR</b>	BLACK
<b>SCALE</b>	2:1 @ A4
<b>DRAWN</b>	MIC
<b>DATE</b>	22/12/11
<b>SHEET</b>	1 OF 1

© GBK UK Limited

THESE DRAWINGS AND THE SPECIFICATIONS, AND THE DATA CONTAINED THEREIN ARE THE PROPERTY OF GBK UK LIMITED, ISSUED IN STRICT CONFIDENCE AND SHALL NOT WITHOUT PRIOR WRITTEN PERMISSION OF GBK UK LIMITED BE PRODUCED, COPIED OR USED FOR ANY PURPOSE WHATSOEVER, EXCEPT THE MANUFACTURE OR ARTICLES FOR GBK UK LIMITED.

<b>DESCRIPTION</b>	<b>DRAWING No.</b>
SCRIVET (DRIVEN PIN)	42029