


NOTES:

COMPONENT IS ROHS/REACH COMPLIANT

Rating: 6A 250VAC/10A 125VAC T85
 Contact Resistance: ≤ 50mΩ
 Insulation Resistance: ≥ 100MΩ
 Dielectric Intensity: ≥ 1500VAC/min
 Life: ≥ 10000 Cycles

Hole Size:
Scale: 2:1

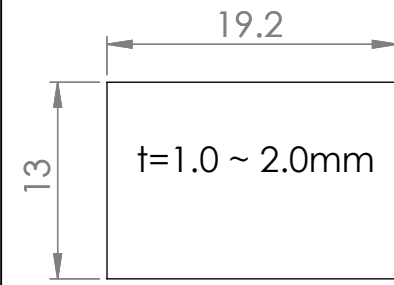


Switch Type:



CONTACT SALES FOR CUSTOMISATION OPTIONS

1	05/08/2019	KN	SALES DRAWING
ISSUE	DATE	SIG	REMARKS

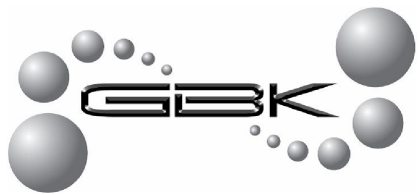

email: info@gbk-uk.com
 web: www.gbk-uk.com

TOLERANCES UNLESS OTHERWISE STATED

X	0.50
X.X	0.25
X.XX	0.10
X.XXX	0.05
ANGLES	0.25

ALL DIMENSIONS IN MM

THIRD ANGLE PROJECTION



DO NOT SCALE DRAWING
 IF IN DOUBT PLEASE ASK

MATERIAL	CONTACT SALES
COLOUR	CONTACT SALES
SCALE	2:1 UNLESS SPECIFIED
DRAWN	KN
DATE	05/08/2019
SHEET	1 OF 1

© GBK UK Limited
 THESE DRAWINGS AND THE SPECIFICATIONS, AND THE DATA CONTAINED THEREIN ARE THE PROPERTY OF GBK UK LIMITED, ISSUED IN STRICT CONFIDENCE AND SHALL NOT WITHOUT PRIOR WRITTEN PERMISSION OF GBK UK LIMITED BE PRODUCED, COPIED OR USED FOR ANY PURPOSE WHATSOEVER, EXCEPT THE MANUFACTURE OR ARTICLES FOR GBK UK LIMITED

DESCRIPTION	DRAWING No.
ROCKER SWITCH	50001-XXX-XXX