


NOTES:

COMPONENT IS ROHS\REACH COMPLIANT

Rating: 6A 250VAC/10A 125VAC T85
Contact Resistance: $\leq 50\text{m}\Omega$
Insulation Resistance: $\geq 100\text{M}\Omega$
Dielectric Intensity: $\geq 1500\text{VAC/min}$
Life: ≥ 10000 Cycles

Hole Size:
Scale: 2:1

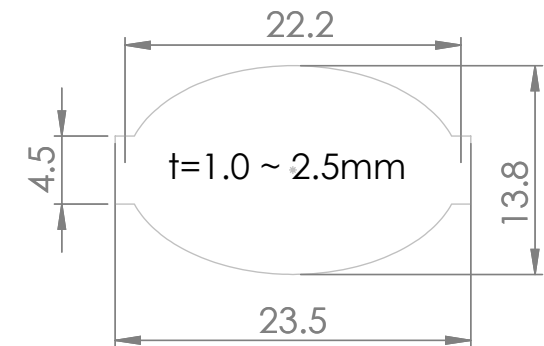

Switch Type:



CONTACT SALES FOR
CUSTOMISATION OPTIONS

1	21/08/2019	BK	SALES DRAWING
ISSUE	DATE	SIG	REMARKS



email: info@gbk-uk.com
web: www.gbk-uk.com

TOLERANCES UNLESS OTHERWISE STATED

X 0.50
X.X 0.25
X.XX 0.10
X.XXX 0.05
ANGLES 0.25

ALL DIMENSIONS IN MM

THIRD ANGLE PROJECTION



DO NOT SCALE DRAWING
IF IN DOUBT PLEASE ASK

MATERIAL	CONTACT SALES
COLOUR	CONTACT SALES
SCALE	2:1 UNLESS SPECIFIED
DRAWN	BK
DATE	21/08/2019
SHEET	1 OF 1

© GBK UK Limited	
THESE DRAWINGS AND THE SPECIFICATIONS, AND THE DATA CONTAINED THEREIN ARE THE PROPERTY OF GBK UK LIMITED, ISSUED IN STRICT CONFIDENCE AND SHALL NOT WITHOUT PRIOR WRITTEN PERMISSION OF GBK UK LIMITED BE PRODUCED, COPIED OR USED FOR ANY PURPOSE WHATSOEVER, EXCEPT THE MANUFACTURE OR ARTICLES FOR GBK UK LIMITED	
DESCRIPTION	DRAWING No.
ROCKER SWITCH WATERPROOF	50011-XXX-XXX